




**SQUALE mini S4 for sealed connection up to 3 conductors and wire 4 mm<sup>2</sup> (x 8)**

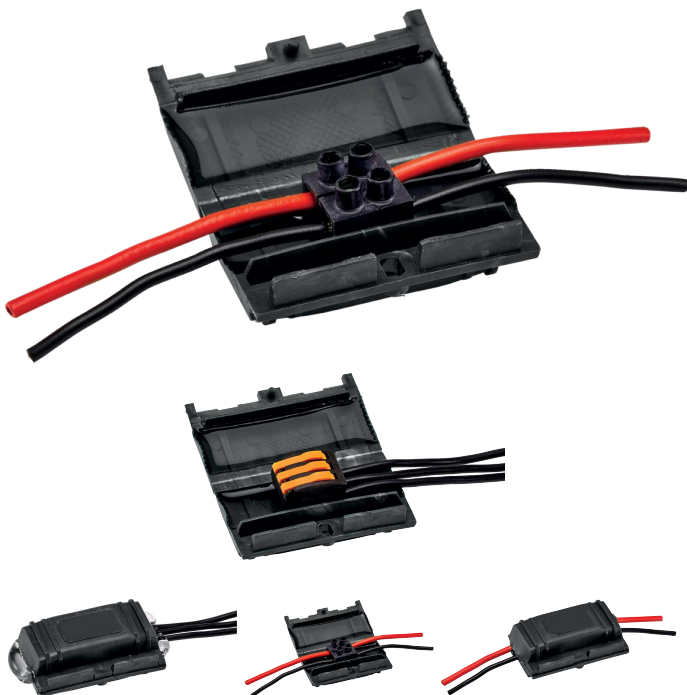

**Characteristics**

Capacity 1 conductor (mm<sup>2</sup>): **1-4**  
 Capacity 2 conductors (mm<sup>2</sup>): **1-4**  
 Dimensions (mm): **61 x 18**  
 Quantity per box : **8**

**Norms**

- ☑ EN 50393 ; EN 60529
- ☑ IP X8

**Benefits**

- Quick repair of your damaged cables.
- Non toxic.

**Compliance marks**



**GENERAL INFORMATION**

**Description**

Connector's sealing cover for wires with a section up to 4 mm<sup>2</sup>.  
 Connection system not included.

**Technical details**

Pre-filled with neutral insulating gel.  
 Installation temperature (°C): -40 to +50.  
 Operating temperature (°C): 90.  
 Maximum cable diameter (mm): 10.

**Application(s)**

Ensures quick and safe sealing of your connections.  
 Ideal in outdoor, damp or immersed environments when it is a cable protected by the cable outer sheath installed in the SQUALE MINI (up to 3 m).  
 Ideal in outdoor and in a derivation box when wires are not protected by a cable outer sheath.

**Instructions**

1. **1.** Make your connection using a block or a connection terminal.
2. **2.** Insert your connection into the SQUALE MINI.
3. **3.** Close the SQUALE MINI, check that the gel slightly protrudes from the SQUALE MINI by winding the wires and/or the cable.

**LOGISTIC INFORMATION**

**Packaging**



**Carton box**

Height (cm) : 11  
 Length (cm) : 12  
 Depth (cm) : 7  
 Net weight (kg) : 0,28  
 Gross weight (kg) : 0,28



**Outer package 1**



**Carton box**

Height (cm) : 44  
 Length (cm) : 50  
 Depth (cm) : 38  
 Net weight (kg) : 28  
 Gross weight (kg) : 28,6



x 100.00

**Outer package 2**



**Pallet**

Height (cm) : 105  
 Length (cm) : 80  
 Depth (cm) : 120  
 Net weight (kg) : 228,8  
 Gross weight (kg) : 260



x 800.00