




Nylon pull-wire fixed endings pulling eye and flexible head with pulling eye 20 m Ø 4 mm without casing

Suitable for passing the needle through unencumbered environments.

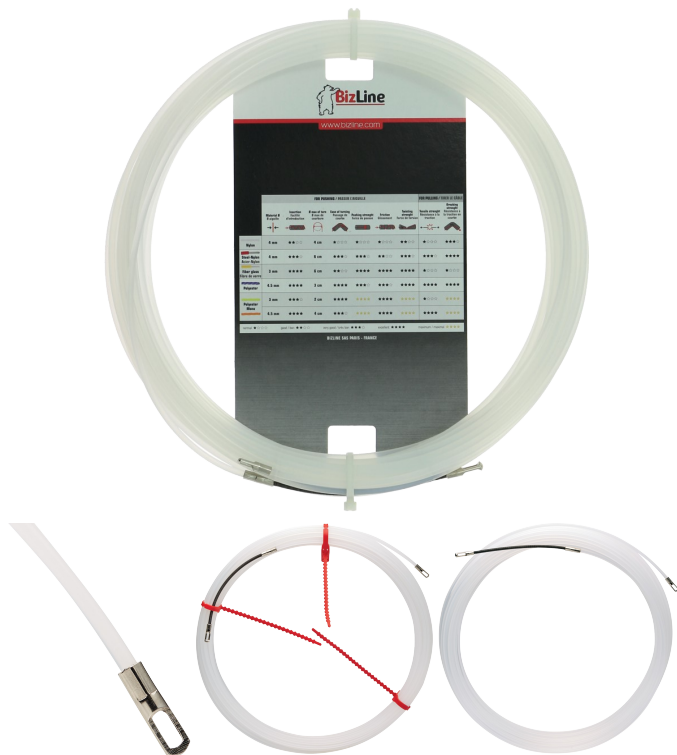

Characteristics

- Length (m) : 20
- Pull-wire Ø (mm) : 4
- Breakage (kg) : 70

Benefits

- Very flexible.
- Low shape memory.

GENERAL INFORMATION

Technical details

Hexagonal crimping of sleeves.
Included:
Flexible head with M5 threaded Ø 6 mm eyelet (BIZ 700 240).
M5 threaded Ø 6 mm eyelet (BIZ 700 241).

Advices

Maximum bending diameter, 4 cm.

Application(s)

For pulling cables through electrical conduits and ducts from 16 to 25 mm.
Ideal for pulls longer than 20 m.

LOGISTIC INFORMATION

Packaging



Color sticker

Height (cm) : 30
Length (cm) : 30
Depth (cm) : 3
Net weight (kg) : 0,305
Gross weight (kg) : 0,305



Outer package 1



Carton box

Height (cm) : 60
Length (cm) : 32
Depth (cm) : 32
Net weight (kg) : 10,7
Gross weight (kg) : 11,4



x 35

Outer package 2



Pallet

Height (cm) : 113
Length (cm) : 120
Depth (cm) : 80
Net weight (kg) : 128,1
Gross weight (kg) : 148,7



x 420